
Take bottom chassis plate and metal-ball caster wheel together with two M3x8mm screws.



Install metal-ball wheel on the bottom chassis plate.



Then use M3 nuts to fix screws.

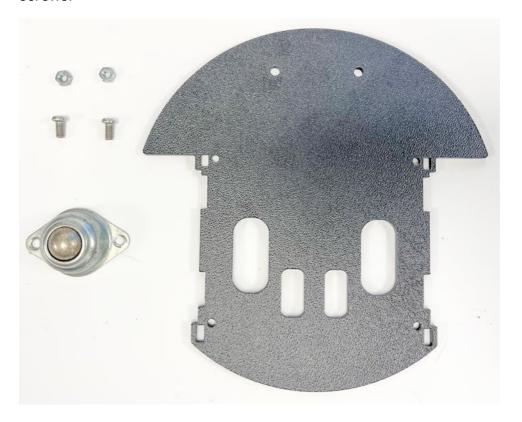